
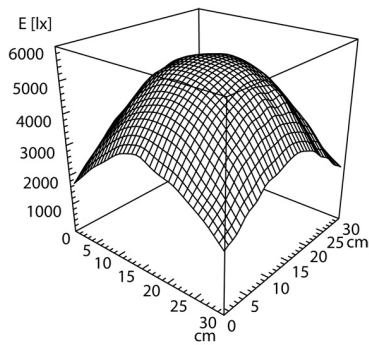
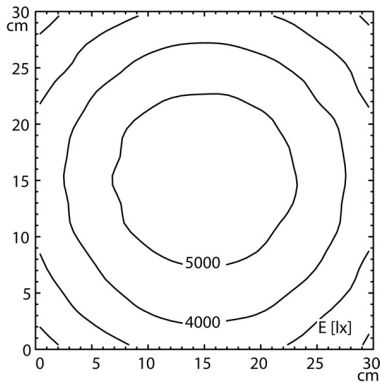


CE



light source
work equipment
connected load
power consumption
luminous flux
luminous efficiency
light distribution
direct ratio
colour temperature
colour temperatur
color rendering index (CRI)
chromaticity tolerance LED
system of protection
class of protection
technology
operation
housing
cover
arm
balance of articulation joints
weight (net)
mains lead
fastening
lens, dimensions
lens material
lens, diopters
special features

LED
electronic plug-in ballast
100-240 V, 50/60 Hz
env. 13 W
approx. 750 lm
approx. 58 lm/W
direct
approx. 100 %
neutral white
approx. 4.000 K
>= 90 (R9>50)
< 3 SDCM
20
II
multi-stage switchable; continuously dimmable
multi-function switch
plastic; untreated; black
screen, milky; Polyamide
tubular aluminium section; anodized; aluminium
coloured anodised
spring
env. 2,5 kg
approx. 3.6 m; mains plug; CEE 7/XVI; BS 1363;
NEMA 1-15P
screw-down flange
Ø 160 mm
glass
3,5
light characteristic can be adjusted with a three-
way switch