



CEE 7/VII

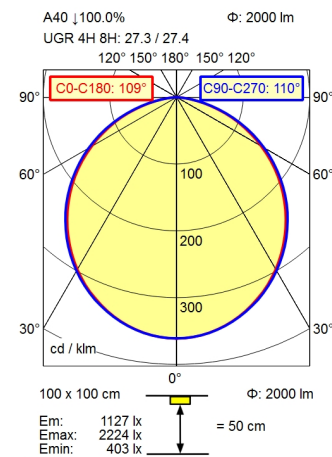

Height (m)	Beam Diameter (m)	Luminance (lx)
0.25	0.70 m 0.72 m	11561 lx
0.50	1.39 m 1.43 m	2890 lx
0.75	2.09 m 2.15 m	1285 lx
1.00	2.78 m 2.87 m	723 lx

- light source
- work equipment
- connected load
- power consumption
- luminous flux
- luminous efficiency
- light type/-color
- colour temperatur
- color rendering index
- light distribution
- direct ratio
- beam angle
- chromaticity tolerance LED
- luminance (L65)
- unified glare rating (4H 8H)
- system of protection
- class of protection
- technology
- operation
- housing
- cover
- arm
- balance of articulation joints
- mains lead
- fastening
- decorative contrast side parts

- LED
- electronic transformer
- 100-240 V, 50/60 Hz; secondary 24 V, DC
- env. 31 W
- approx. 2.000 lm
- approx. 74 lm/W
- adjustable white
- approx. 3.000 K; approx. 4.000 K; approx. 5.000 K;
- approx. 6.500 K
- CRI > 90; R9 > 50
- direct
- approx. 100 %
- 110°
- < 3 SDCM
- <= 23000 cd/m²
- <= 28
- IP 20
- I with plug-in power supply; III without plug-in power supply
- Touch DIM
- multi-function switch
- aluminium coloured anodised
- structured; plastic
- silver metallic
- spring
- ca. 3,40 m; mains plug; CEE 7/VII
- table base
- black

